


Pen Type Digital Multimeter

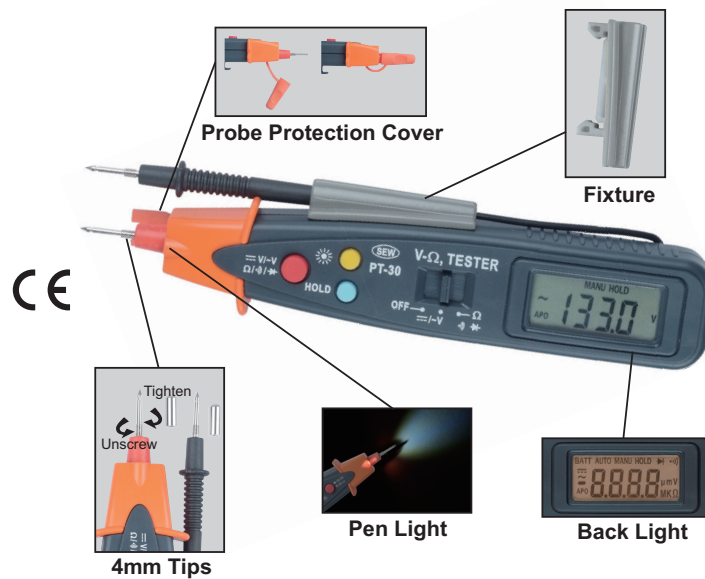

PT-30

FEATURES

- Lightweight, compact, and easy to use.
- 4000 counts LCD.
- Full automatic measurement, voltage measurement, resistor measurement.
- Data hold function.
- Auto off function.

- Continuity check.
- Diode measurement.
- Low battery indication.
- Pen light provided.
- Backlight LCD.
- 3V DC power supply.

SPECIFICATIONS

DC Voltage :

Ranges	4V	40V	400V	600V
Resolution	1mV	10mV	100mV	1V
Accuracy	$\pm(1\%rdg+3dgt)$			
● Input impedance : 10M Ω				

AC Voltage :

Ranges	4V	40V	400V	600V
Resolution	1mV	10mV	100mV	1V
Accuracy	±(1.5%rdg+5dgt)			
● Input impedance : 10MΩ				

Resistance:

Ranges	400Ω	4kΩ	40kΩ	400kΩ	4MΩ	40MΩ
Resolution	0.1Ω	1Ω	10Ω	100Ω	1kΩ	10kΩ
Accuracy	±(1.5%rdg+3dgt)					±(2.5%rdg+4dgt)
● Overload Protection 500V DC						

Continuity Test:

Ranges	400 Ω
Audible threshold	Less than 25 Ω

Diode Test : Test voltage approx. 0.3V to 2V

GENERAL

Low battery indication	"BATT" sign appears on the display when the battery voltage drops below accurate operating level.
Dimensions	196(L) × 35.8(W) × 28.3mm(D)
Weight (battery included)	Approx. 105g
Power source	DC 3V (CR2032) × 1
Safety standard	EN 61010-1 CAT III 600V EN 61326-1
Accessories	Instruction manual Fixture Soft pouch Battery

